

# Product Data Sheet

Astro Intu Mastic

UIC of product-type: INTUM

Revision 12 - 16th March 2021




ETA 20-1088/20-1089  
CE-2812-CPR-IA5015



## Astro Intu Mastic

### Intumescent Acoustic Mastic

- CE Marked.
- Certifire Approved.
- ULEU Accreditation.
- Fire resistance tested in flexible walls, rigid walls and floors.
- Tested in Linear Joints up to 50mm wide.
- Tested in large service openings up to 490 x 150mm.
- Tested with Metallic Pipes, Cables, Cable Bunches, Cable Trays and Cable Ladders.
- For use in low movement joints, remains flexible.
- Halogen free, resists fungi and vermin.
- Shelf Life 18 months.
- Tested in accordance with EN1366-3:2009 - Fire Resistance - Penetration Seals.
- Tested in accordance with EN1366-4:2009 - Fire Resistance - Linear Seals.
- Classified in accordance with EN13501-2 - Fire Resistance.
- Tested in accordance with EN10140-2:2010 - Airborne Sound.
- Tested in accordance with EN1026:2000 - Air Permeability.

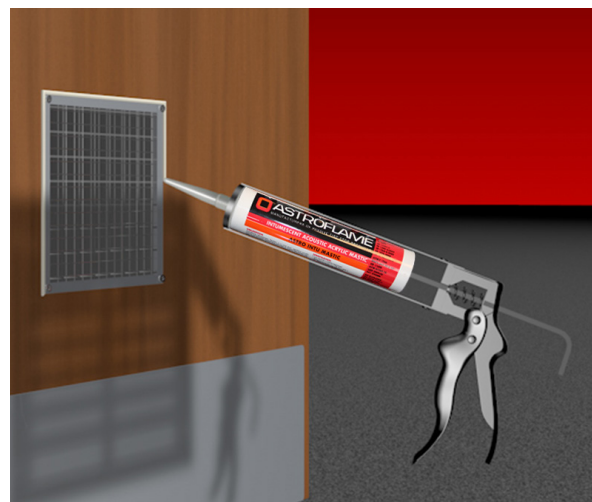

### Product Description

Astro Intu Mastic is a water based acrylic sealant used to reinstate the fire resistance of wall and floor constructions in linear joints and where apertures are penetrated by multiple services. Astro Intu Mastic Fire Resistant Sealant has been developed utilising specialist polymer technologies allowing it to be tested and Certified to internationally recognised standards, including, Certifire, CE marking and UL Listings. Astro Intu Mastic Fire Resistant has been tested and Certified as part the Astroflame Fire Stopping range. The Astro Intu Mastic system can be installed across a variety services and substrates including,

- Flexible and Rigid Walls
- Rigid Floors
- Multi-Service penetrations
- Blank Openings
- Head of Walls
- Astro Batt



2812

Astroflame Fireseals Ltd  
Unit 8 The I O Centre  
Stephenson Road  
Segensworth, Fareham  
Hampshire PO15 5RU  
20  
2812-CPR-JA5015

ETA - 20/1088  
ETA - 20/1089  
ETAG 026 - Part 1  
ETAG 026 - Part 2  
ETAG 026 - Part 3  
ASTRO INTU MASTIC  
"see ETA-20/1088 & ETA  
20/1089 for relevant  
characteristics"

## Properties

| General Characteristics            | Inspection Method     | Value              |
|------------------------------------|-----------------------|--------------------|
| <b>Product Data (uncured)</b>      |                       |                    |
| Density (S.G)                      | ASTM D792:13          | 1.63               |
| Appearance                         |                       | Paste, matt finish |
| Resistance to flow                 | ISO 7390 : 2003       | Pass               |
| <b>Product Data (after curing)</b> |                       |                    |
| Hardness Shore A                   | ISO 7619-1 : 2010     | 63/39              |
| Movement Capability                |                       | 7.5%               |
| Operating Temperature °C           |                       | -5 to 40           |
| Loss Mass of Mass on Heating       | ISO 3451-1 (Method A) | 68.34              |
| Flexibility - Bend Test            | ISO 1519              | Pass               |
| Conditioning                       | EOTA TR024            | Type X             |

## Product Availability

The Astro intu Mastic Comes in Three Colours - White , Brown & Grey in Both 310ml Cartridge & 600ml Foils

| Product Code | Product Description       | Size  |
|--------------|---------------------------|-------|
| AFIM         | Astro Mastic White        | 310ml |
| AFIMB        | Astro Mastic Brown        | 310ml |
| AFIMG        | Astro Mastic Grey         | 310ml |
| AFIMWFOIL    | Astro Mastic White - Foil | 600ml |

600ml Foils in a Brown or Grey colour available P.O.A

## To Order & Specify

Please contact us and quote the following information - Quantity / Product Code / Product Description / sizes  
 Typical example:- 10 / AFIM / Astro Mastic White / 310ml

>> Tel: [01329 844 500](tel:01329844500) or >> Email: [sales@astroflame.com](mailto:sales@astroflame.com)

## Installation

We have technical representatives who provide assistance in the selection and specification of the products on this site and should be consulted for exact installation and product suitability. Ensure an early engagement with ourselves, designers, main contractor and specialist installers before any installation. Other trades and/or manufacturers may need to be consulted. For in-depth information, specification and technical advice please call our Head Office on tel [01329 844 500](tel:01329 844 500) or email [sales@astroflame.com](mailto:sales@astroflame.com)

## Maintenance

All interested parties, designer, specifier, main contractor and specialist installers should provide access to allow the fire stopping seals to be regularly inspected and maintained, as well as records kept of such maintenance at minimum periods of 12 months, as required by the Regulatory Reform Order, and repaired if necessary. Reference should be made to ASFP TGD 17 – Code of Practice for the Installation and Inspection of Fire Stopping.

## Competency

It is vital that those entrusted to design or install a fire stopping product have the necessary levels of competence to undertake the task professionally and thoroughly. The level of competency required will be commensurate with the expected complexity of the building. All designers must eliminate, reduce or control foreseeable risks that may arise during installation, construction or maintenance when preparing or modifying designs. Clients should ensure that the principal designer and principal contractor carry out their duties under CDM regulations. The ASFP foundation course in passive fire protection provides essential knowledge as part of demonstrating competency and understanding in this key fire protection specialism.

## Additional Notes

Please refer to the ETA sheet for fields of application for this product. For further information on installation requirements please refer to the manufacturer of the services and the wall/floor specification to ensure the compatibility of this product, if in doubt please contact the technical team with services and wall/floor specification on: T: [01329 844 500](tel:01329 844 500) or E: [sales@astroflame.com](mailto:sales@astroflame.com)

## Health and Safety

Please see (SDS) Safety Data sheet - This can be requested from our sales team T: [01329 844 500](tel:01329 844 500) or E: [sales@astroflame.com](mailto:sales@astroflame.com)

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME (FIRE SEALS) LTD has no control over the specific application or installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product based on the products limitation of applications and that the product is fit for purpose for their intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROFLAME (FIRE SEALS) LTD, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice. If you are in any doubt as to the suitability of this product for your intended application please contact our technical team on 01329 844500 or email [sales@astroflame.com](mailto:sales@astroflame.com) and we will contact you.